Nio 5MP (MDNG-6121)

5 MegaPixel (2800 x 2096) diagnostic grayscale display system

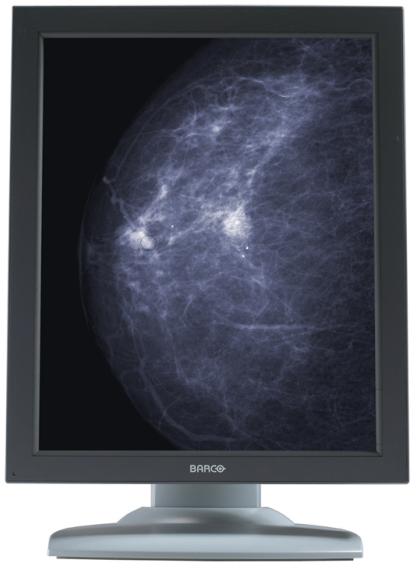

Nio 5MP (MDNG-6121) is a flexible diagnostic display system with a resolution of 2800 x 2096. Thanks to its high luminance and contrast, Nio 5MP is a perfect solution for a wide range of medical imaging applications, such as X-ray, PACS, MRI, angiography, computed tomography and mammography on PACS.

High-quality imaging

The Nio 5MP brings high brightness, exceptional crispness and an excellent viewing angle to your readings. Backlight Output Stabilization (BLOS) technology guarantees fast power-up and continuously stabilizes the luminance output of the LCD's backlight.

Fully transparent calibration and QA

Barco's Nio 5MP is bundled with MediCal QAWeb for automated DICOM calibration, Quality Assurance, display asset management, problem solving and reporting, guaranteeing maximum diagnostic confidence and uptime of your PACS display systems.

The Nio 5MP display system includes:

· A 5 MegaPixel flat panel display
· MediCal QAWeb software for automated calibration and Quality Assurance
· A high-speed, high-performance display controller: check the compatibility matrix

BARCO
Visibly yours

Product specifications	Nio 5MP (MDNG-6121)
Screen technology	TFT AM LCD Dual Domain IPS
Active screen size (diagonal)	541 mm (21.3")
Active screen size (H x V)	432 x 324 mm (17.0 x 12.8")
Aspect ratio (H:V)	4:3
Resolution	5MP (2800 x 2096)
Pixel pitch	0.1540 mm
Color imaging	No
Gray imaging	Yes
Number of grayscales (LUT in/LUT out)	1024 grey levels (10/12)
Viewing angle (H, V)	170°
Uniform Luminance Technology (ULT)	Yes
Per Pixel Uniformity (PPU)	No
Ambient Light Compensation (ALC)	No
Backlight Output Stabilization (BLOS)	Yes
I-Guard	No
Maximum luminance	1100 cd/m²
DICOM calibrated luminance (ULT off)	500 cd/m²
Contrast ratio (ULT off)	1000:1
Response time (Tr + Tf)	32 ms
Video input signals	DVI-D Dual Link
USB ports	1 upstream (endpoint), 2 downstream
USB standard	2.0
Power consumption (nominal)	78W
Power save mode	Yes
Dimensions with stand (W x H x D)	Portrait: 382 x 577~637 x 249 mm Landscape: 488 x 472~532 x 249 mm
Dimensions w/o stand (W x H x D)	Portrait: 382x 488 x 114 mm Landscape: 488 x 382 x x 114 mm
Net weight with stand	12.3 kg
Mounting standard	VESA (100 mm)
Screen protection	Protective, non-reflective PMMA cover
Recommended modalities	CT, MR, US, DR, CR, NM, Film
Certifications	UL 60601-1 1ST EDITION, CAN/ CSA-C22.2 NO. 601.1-M90, IEC 60601-1 2ND ED:1988 + A1:1991 + A2:1995, IEC 60950-1:2001 1ST EDITION, CE - 2004/108/EC, CE - 93/42/EC, A1:2007/47/EC CLASS IIB, DEMKO - EN 60601-1, CCC - GB9254-2008 + GB4943-2001 + GB17625.1-2003, BSMI - CNS13438(95) + CNS14336(94), KCC, VCCI, FCC class B, FDA 510K, Rohs
Supplied accessories	Getting Started Guide Quick-Installation Sheet Video cable (DVI Dual Link) Main cables (UK, European (CEBEC/KEMA), USA (UL/CSA; adaptor plug NEMA 5-15P), Chinese (CCC)) USB 2.0 cable External power supply
Optional accessories	NA
QA software	MediCal QAWeb
Warranty	5 years

Generated on: 01 Dec 2014
Technical specifications are subject to change without prior notice.
Please check www.barco.com for the latest information.